

Power Cable

LinkIT Power Cable CEE 7/7 - C13 Black PVC 2.0 m

PVC 3 x 0,75 mm²

Product number: NYESC13-2M

El-number: 6955977

Product Description

Power cable with CEE 7/7 to C13 in black color. This cable is normally used as a power cable to monitor or PC. Certifications: RoHs, CE, VDE.

Main Specifications

Brand	LinkIT
Color	Black
Length (m)	2
Connector type 1	CEE 7/7
Connector type 2	C13 (F)
Conductor material	3 Wire
Number of conductors	3

Extended Specifications

NVP value	69%
Jacket material	PVC
Angle contact 1	Angeled
Angle Contact 2	Straight
Voltage	AC 110-250V
Amperage	10A
Conductor colour code	Brown, Blue, Green, Yellow
Gauge	3X0.75MM2
Operating Temperature	-20 - 70 °C



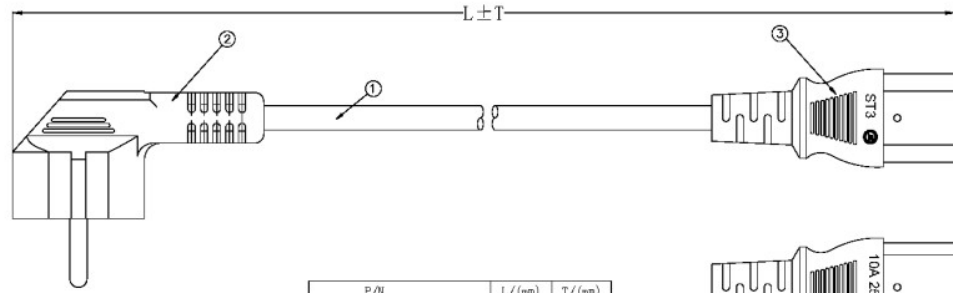



Halogenfree	X
With Earthing	V
EAN	7090033565853
Certifications	CE, REACH, VDE, RoHS

Single packaging

GTIN f-pak	7090033565853
Unit	PCE
Quantity	1
Height (cm)	25
Width (cm)	10
Depth (cm)	4
Weight (kg)	0,21
Gross Weight (kg)	0,22



Dimensional Sketches

RevNo.	Revision note	Date	Signature	Checked																									
																													
<table border="1" style="margin: auto;"> <thead> <tr> <th>P/N</th> <th>L/ (mm)</th> <th>T/ (mm)</th> </tr> </thead> <tbody> <tr> <td>20249 NYBSC13-1M</td> <td>1000</td> <td>30</td> </tr> <tr> <td>16313 NYBSC13-2M</td> <td>2000</td> <td>50</td> </tr> </tbody> </table>					P/N	L/ (mm)	T/ (mm)	20249 NYBSC13-1M	1000	30	16313 NYBSC13-2M	2000	50																
P/N	L/ (mm)	T/ (mm)																											
20249 NYBSC13-1M	1000	30																											
16313 NYBSC13-2M	2000	50																											
																													
																													
<p>NOTES:</p> <ol style="list-style-type: none"> 1. Open/Short/Intermittence:100% 2. Rated voltage:250V 3. Rated current:10A 4. Max. Working Temperature:70°C 5. IEC/TC20 Class:IP22 6. RoHS & REACH Compliant 																													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Itemref</th> <th>Quantity</th> <th>Title/Name, designation, material, dimension etc</th> <th colspan="2">Article NO./Reference</th> </tr> </thead> <tbody> <tr> <td>①</td> <td>1</td> <td>PLUG</td> <td>ST3:C13 PVC/BLACK</td> <td>1 PCS</td> </tr> <tr> <td>②</td> <td>1</td> <td>PLUG</td> <td>S03:Angled Schuko PVC/BLACK</td> <td>1 PCS</td> </tr> <tr> <td>③</td> <td>L</td> <td>CABLE</td> <td>H05VV-F 3*0.75mm² PVC/BLACK JACKET OD: 6.5 ± 0.2mm MARKING: <VDE> H05VV-F 3G0.75mm² NINGBO OUSHENG</td> <td>MM</td> </tr> <tr> <td>NO.</td> <td>MATERIAL</td> <td colspan="2">DESCRIPTION</td> <td>QTY. UNIT</td> </tr> </tbody> </table>					Itemref	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference		①	1	PLUG	ST3:C13 PVC/BLACK	1 PCS	②	1	PLUG	S03:Angled Schuko PVC/BLACK	1 PCS	③	L	CABLE	H05VV-F 3*0.75mm ² PVC/BLACK JACKET OD: 6.5 ± 0.2mm MARKING: <VDE> H05VV-F 3G0.75mm ² NINGBO OUSHENG	MM	NO.	MATERIAL	DESCRIPTION		QTY. UNIT
Itemref	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference																										
①	1	PLUG	ST3:C13 PVC/BLACK	1 PCS																									
②	1	PLUG	S03:Angled Schuko PVC/BLACK	1 PCS																									
③	L	CABLE	H05VV-F 3*0.75mm ² PVC/BLACK JACKET OD: 6.5 ± 0.2mm MARKING: <VDE> H05VV-F 3G0.75mm ² NINGBO OUSHENG	MM																									
NO.	MATERIAL	DESCRIPTION		QTY. UNIT																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Designed by</th> <th>Checked by</th> <th>Approved by - date</th> <th>File name</th> <th>Date</th> <th>Scale</th> </tr> </thead> <tbody> <tr> <td>FLY</td> <td>HELEN</td> <td>2023.02.23</td> <td></td> <td>2023.02.23</td> <td>FREE</td> </tr> </tbody> </table>					Designed by	Checked by	Approved by - date	File name	Date	Scale	FLY	HELEN	2023.02.23		2023.02.23	FREE													
Designed by	Checked by	Approved by - date	File name	Date	Scale																								
FLY	HELEN	2023.02.23		2023.02.23	FREE																								
																													
Angled Schuko TO C13 3*0.75mm ² Edition 1 / Sheet 1/1																													

